comer industries
driveshafts

End fittings		Max. torque
Tractor	Cod: C12	–
Implement	Cod: C12	–

Notes:

CE CERTIFIED

Warning !
Sections of driveline marked ⚠ are not shielded and must be shielded by an interactive guarding system.
COMER spa declines responsibility if proper guards are not provided or maintained.

Features

Series:	T
Type:	60
Code:	07.625.203.11
Description:	T600860ENC12C12
Customer's code:	–
Colour:	Black

Last drawing

Index: – Date: –

Application

–

Driveline data

X	1 3/8" Z6 DIN 9611
Y	1 3/8" Z6 DIN 9611
E	700
I	715
P	630

Overlap

	Steel tubes	Guard
Max.	667	610
Min.	240	183

Greasing point

1)	–
2)	–

The dimensioning is cross to cross



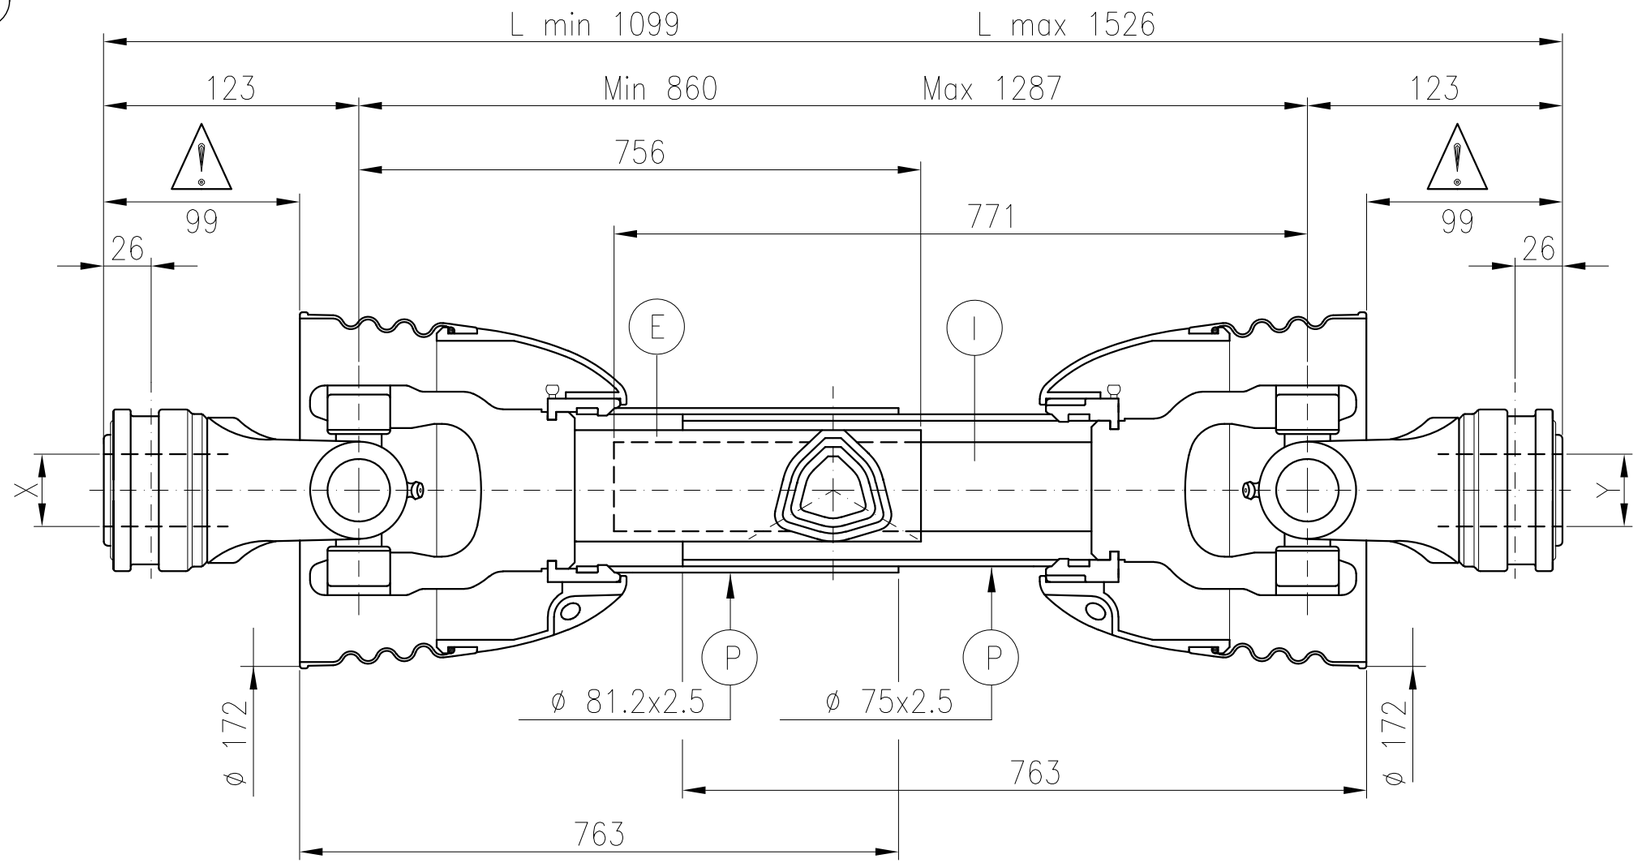





Cross and tubes

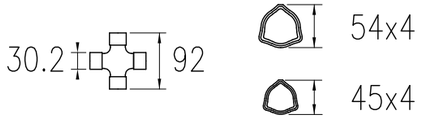

Data 540 r.p.m.

KW	CV	Nm.	in.lb.
47	64	830	7350

Data 1000 r.p.m.

KW	CV	Nm.	in.lb.
74	100	710	6259

Continuous operation data and conditions,working angle 5°, average life 1000 hours

1100 min.$^{-1}$ r.p.m. max.



Data for only critical velocity

540 r.p.m.		1000 r.p.m.	
Max.	–	Max.	–
L max.	–	L max.	–
Checked:		Signed by:	A.Sa.

Customer:

—

Date: 02-09-20